(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property **Organization**

International Bureau



(43) International Publication Date 22 July 2004 (22.07.2004)

PCT

(10) International Publication Number WO 2004/062042 A1

(51) International Patent Classification⁷:

H01R 12/20

(21) International Application Number:

PCT/US2003/039595

(22) International Filing Date:

11 December 2003 (11.12.2003)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

0207786-5

20 December 2002 (20.12.2002)


- (71) Applicant (for all designated States except US): MOLEX INCORPORATED [US/US]; 2222 Wellington Court, Lisle, Illinois 60532 (US).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): POH, Edmund, W., M. [SG/US]; 1755 Mundelein Road, Naperville, IL 60565 (US). CHANG, Lily, T., C. [SG/US]; 1755 Mundelein Road, Naperville, IL 60565 (US).

- (74) Agent: ZEITLER, Robert, J.; Molex Incorporated, 2222 Wellington Court, Lisle, IL 60532 (US).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

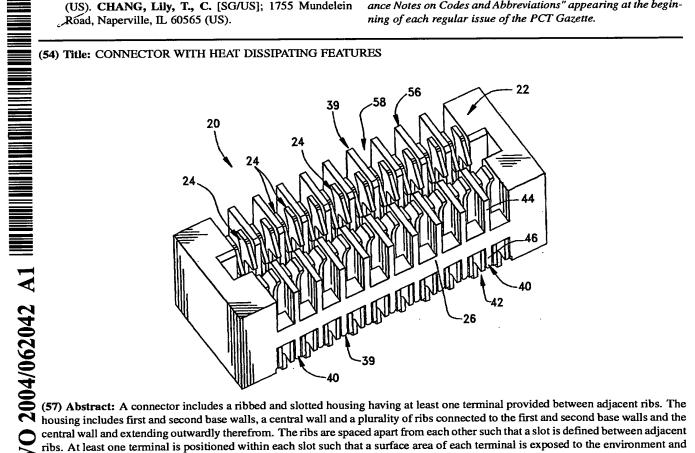

central wall and extending outwardly therefrom. The ribs are spaced apart from each other such that a slot is defined between adjacent ribs. At least one terminal is positioned within each slot such that a surface area of each terminal is exposed to the environment and air can flow over the surface area to dissipate heat from the at least one terminal.

